

Polymatech[®]



DATA SHEET

POLYMATECH STANDARD COB Series

Version 2

FL36COB3030 ALWAYS WHITE

Art Gallery and Museum Lighting



POLYMATECH ELECTRONICS LIMITED
www.polymatech.in

Polymatech Always White LED: Where Precision meets Expression



Lighting is the soul of an art gallery or museum. The way light interacts with an artwork can elevate its beauty or diminish its essence. This is why choosing the right lighting solution is as important as the artwork itself.

Polymatech's **Always White LED** with CRI 70 ensures true-to-life color reproduction, allowing every detail, brushstroke, and shade to be seen exactly as the artist intended. Without high-CRI lighting, subtle tones and textures are often lost, but with Always White LEDs, authenticity is preserved.



Designed for galleries and museums, our solutions offer unmatched flexibility—from precision mounting options to smooth dimming controls—ensuring that every piece of art is displayed in its truest brilliance. At Polymatech, we don't just provide lighting; we create the perfect atmosphere for art to shine.

Light is Nature


Polymatech Always White – Bringing Art to Life

POLYMATECH ELECTRONICS LIMITED
www.polymatech.in

Field of Use

Polymatech Always White CRI 70: Illuminate True Artistry

Polymatech's Always White CRI 70 LED solutions are engineered to deliver precise, natural light for art galleries and museums. With superior color rendering, these LEDs ensure that every artwork—whether a centuries-old painting, modern sculpture, or delicate artifact—is displayed in its truest form. By replicating daylight-like illumination, Polymatech empowers curators to present art as intended by its creators, safeguarding authenticity and enhancing viewer experience.

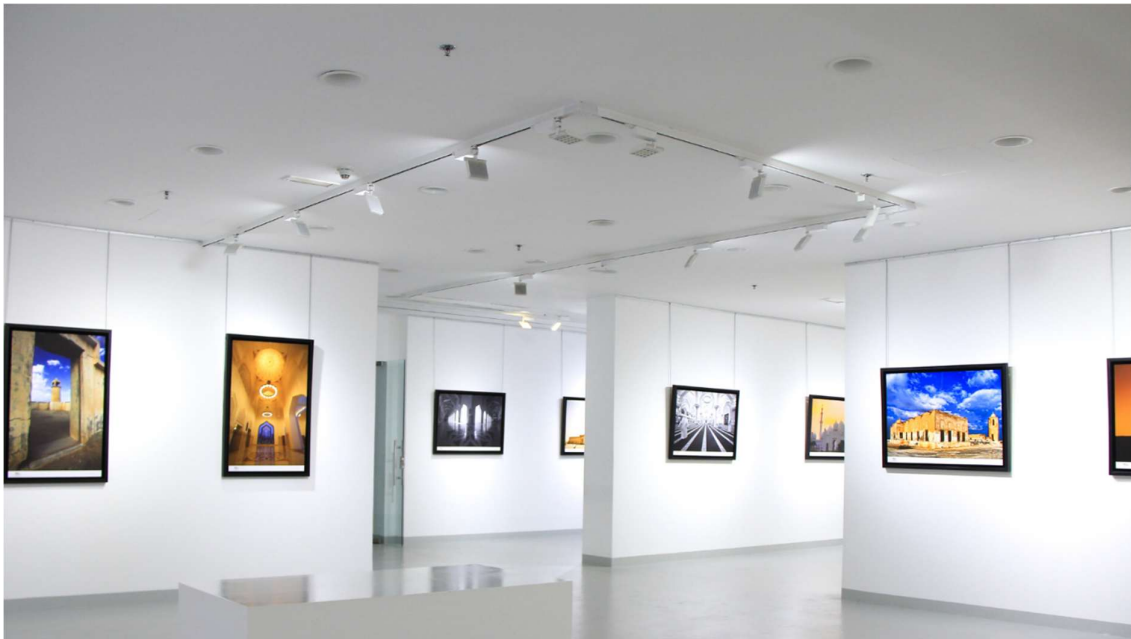

Unmatched Color Rendering for Artistic Integrity

- **CRI 70 Accuracy:** With a Color Rendering Index above 70, Polymatech LEDs reproduce colors with near-sunlight fidelity, preserving subtle tones in paintings, textiles, and sculptures.
- **True-to-Life Whites:** Unlike standard LEDs that distort shades, Polymatech Always White LEDs maintain accurate whites, vital for highlighting textures and fine details.

Preserving Art with Gentle Illumination

- **UV & IR Free:** Traditional lighting often emits harmful ultraviolet or infrared radiation that accelerates fading. Polymatech LEDs are designed to protect delicate art surfaces.

- **Low Heat Emission:** Prevents thermal stress on sensitive artworks and artifacts, ensuring long-term preservation.



Enhancing the Viewer's Experience

- **Natural Ambience:** Always White LEDs mimic natural daylight, offering visitors an immersive and comfortable viewing environment.
- **Detail Revelation:** Fine brush strokes, layered textures, and nuanced shades become more visible under high-CRI lighting, deepening audience appreciation.




Designed for Curators and Conservators

- **Flexible Applications:** From spotlighting a single masterpiece to evenly illuminating vast galleries, Polymatech LEDs adapt to curatorial needs.
- **Longevity & Efficiency:** Long operational life and energy-efficient performance reduce maintenance and operating costs for museums.

Why Polymatech Outshines Competitors

- **Spectral Superiority:** Many LEDs compromise on CRI or produce unnatural color tones. Polymatech's Always White LEDs achieve a CRI 70 standard that few competitors can match.
- **Visual Comfort:** Flicker-free and glare-controlled designs reduce eye strain, enhancing the visitor journey through galleries.
- **Preservation & Presentation Balance:** Polymatech uniquely combines conservation-focused lighting with aesthetics-driven illumination.

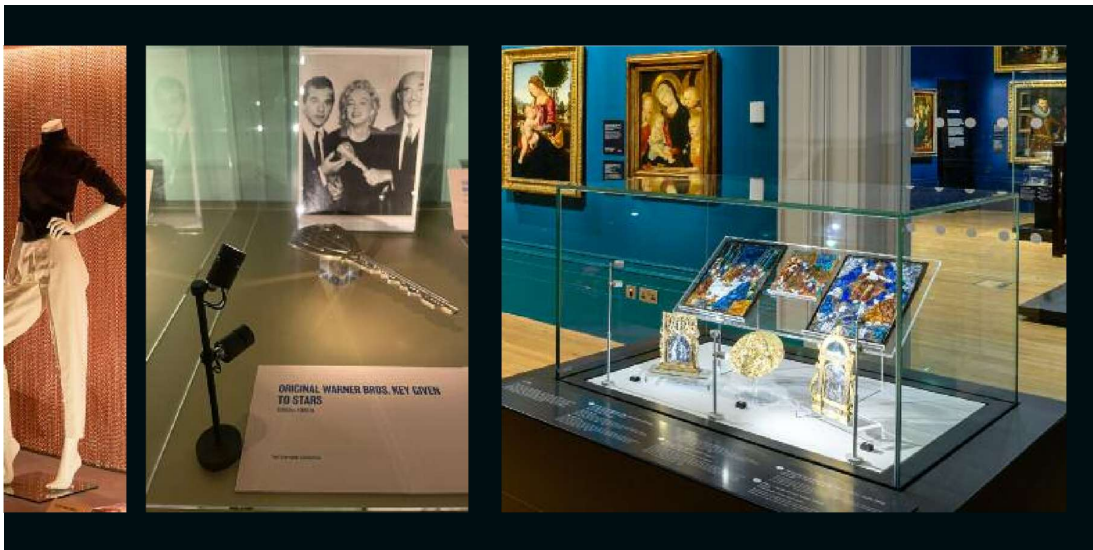

Conclusion


Polymatech Always White CRI 70 LEDs redefine museum and gallery lighting by delivering superior color rendering, artifact-safe illumination, and energy-efficient performance. With the ability to highlight true colors, textures, and details, Polymatech ensures that every exhibit is displayed authentically and preserved for future generations.

Contents

| | | |
|----|-----------------------------|------|
| 1. | Introduction | P 7 |
| 2. | Performance Characteristics | P 9 |
| 3. | Mechanical Dimensions | P 10 |
| 4. | Characteristic Curves | P 11 |
| 5. | Reliability | P 14 |
| 6. | Packing Specification | P 16 |
| 7. | Precaution | P 17 |

Product Nomenclature

FL36COB3030 ALWAYS WHITE



| | | |
|-----|-----------------------|---------------|
| [1] | Product shape | : FL36COB3030 |
| [2] | Die count in series | : 12 |
| [3] | Die count in parallel | : 01 |
| [4] | CRI (Ra) | : 70 |

INTRODUCTION

Product Description

The FL36COB3030 series of high-flux, multi-die arrays in a smaller, easy-to-use platform. With FL36COB3030 LED lighting-class reliability, the FL36COB3030's small, uniform emitting surface enables both directional and non-directional lighting applications including lamp retrofit and luminaire designs. featuring a 17-mm optical source, the FL36COB3030 brings new levels of flux and efficacy to this form factor.

The FL36COB3030 series is designed with flip chip technology which has high heat emission property thus increasing product life and maintaining same CRI output.

Applications

- Exhibition Halls
- Spotlighting Masterpieces
- Conservation Lighting
- Sculpture & 3D Art Display
- Textile & Historical Artifact Showcase
- Gallery Ambience Lighting
- Temporary Exhibitions & Rotating Displays
- Museum Stores & Reception Areas

Features

- Mechanical Dimensions : 30×30×1(mm)
- Packaging Structure : Aluminium Base Chip on Board
- Reference Assembly : M4 screw, Connector
- Thermal Resistance : 2C/W
- CRI(Ra) : 70
- Maximum Drive Current : 500mA
- RoHS Complaint.
- Better die arrangement for optics.
- Wide range of luminous flux and high efficacy.
- Improved lumen density compared with previous version.
- High Thermal conductivity package.
- Large, monolithic chips with uniform emitting area.
- Encapsulated die with low profile protective window for higher lumen output.
- Electricity isolated thermal path.
- Environmentally friendly: RoHS and REACH complaint.

Performance Characteristics

(Tj=85C)

| Product code | Luminous flux (lm) | | | Efficacy (lm/W) | Forward Current (mA) | Forward Voltage (V) | | |
|--------------------------|--------------------|------|--------|-----------------|----------------------|---------------------|------|------|
| | Tj85C | | Tc25C* | | | Min. | Typ. | Max. |
| | Min. | Typ. | Max. | Typ. | | | | |
| FL36COB3030 ALWAYS WHITE | 396 | 450 | 489 | 148 | 500 | 82 | 92.5 | 103 |

Notes:

1. Polymatech Electronics maintains a tolerance of $\pm 10\%$ on luminous flux measurements.
2. Polymatech Electronics maintains a tolerance of $\pm 3\%$ on forward voltage measurements.
3. Polymatech Electronics maintains a tolerance of $\pm 2\%$ on Ra measurements.

*: Values of Luminous flux at Tc=25C are provided as reference only.

Absolute Maximum Ratings

| Parameter | Symbol | Rating | |
|--------------------------|--------|-------------|----|
| Input Power | Pi | 6.4 | *1 |
| Forward Current(mA) | If | 500 | *1 |
| Reverse current(mA) | Ir | 1 | |
| Operating Temperature(C) | Top | -40 ~ +100 | |
| Storage Temperature(C) | Tst | -40 ~ + 100 | *2 |
| Case Temperature(C) | Tc | 105 | |
| Junction Temperature(C) | Tj | 125 | *3 |

*1. Input power and forward current are the values when the LED is used within the range of the derating curve in this data sheet.

*2. Refer to 3. Outline drawing for Tc MEASUREMENT POINT.


*3. Junction temperature calculation formula: $T_j = T_c + R_{j-c} \times P_i$

Characteristics Curves

Forward Current Characteristic/Temperature Characteristics


Forward Current VS. Forward Voltage

$T_c=25C$

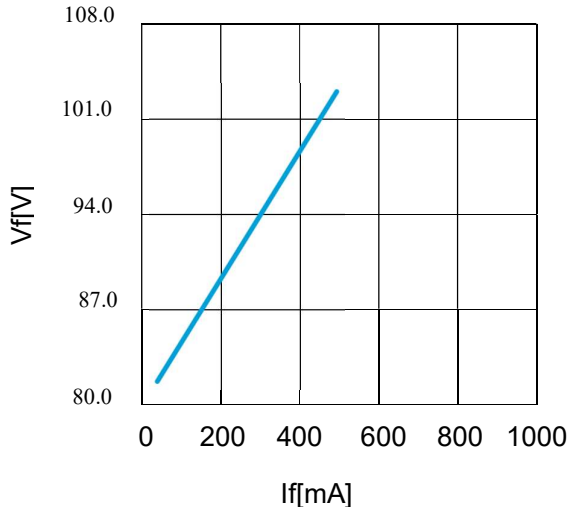


Case Temperature vs. Forward Voltage

$I_f=90mA$

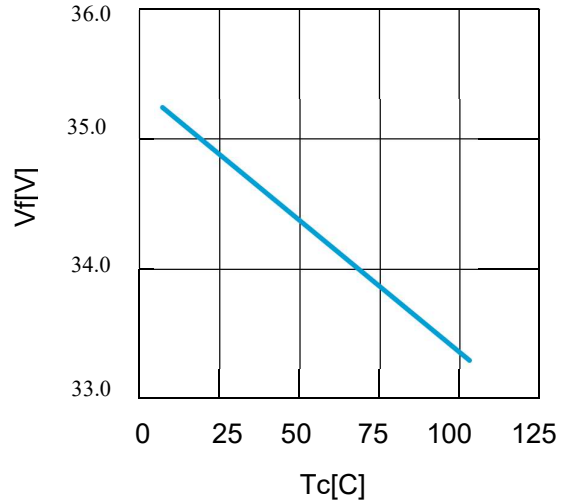


Forward Current VS. Relative Luminous Flux

$T_c=25C$

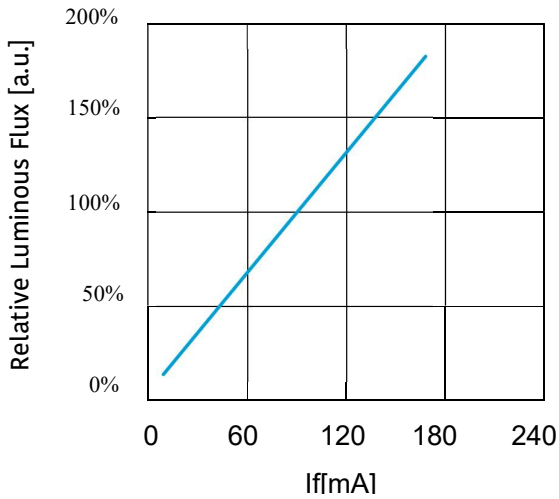

Case Temperature vs. Relative luminous flux


$I_f=90mA$

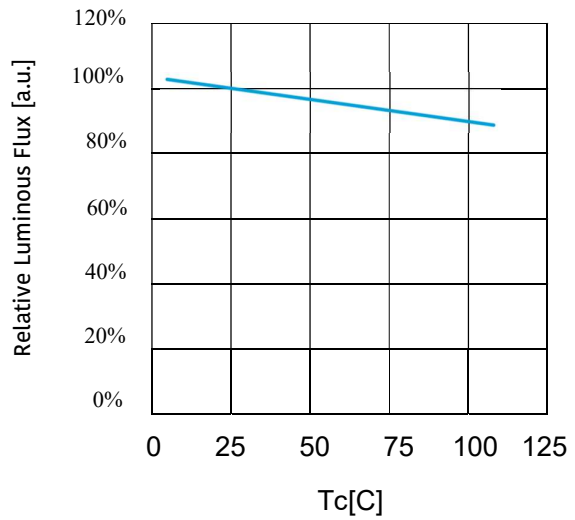


Optical Characteristics

Spectrum: CRI(Ra) 70

Spectral Power Distribution

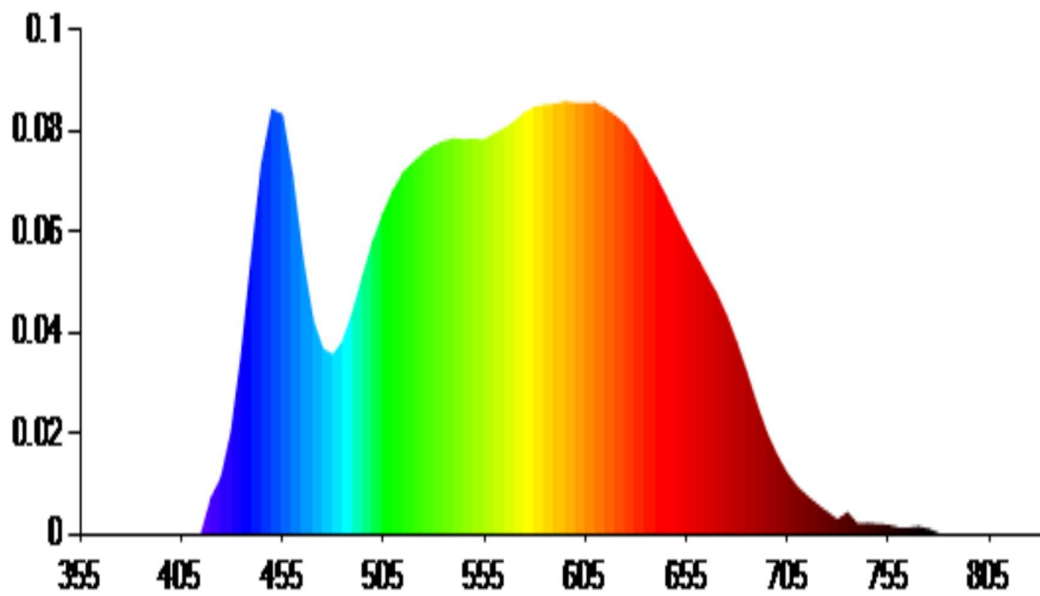


Optical characteristics (continued) Radiation Characteristics

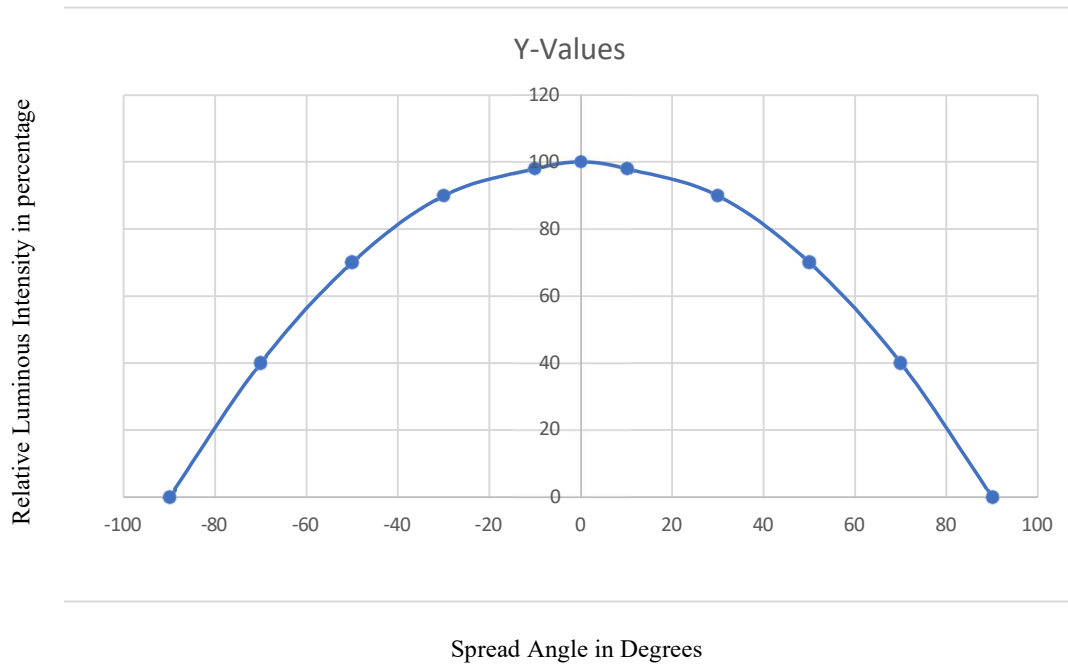

Derating Characteristics

Case Temperature

vs. Allowable Forward Current

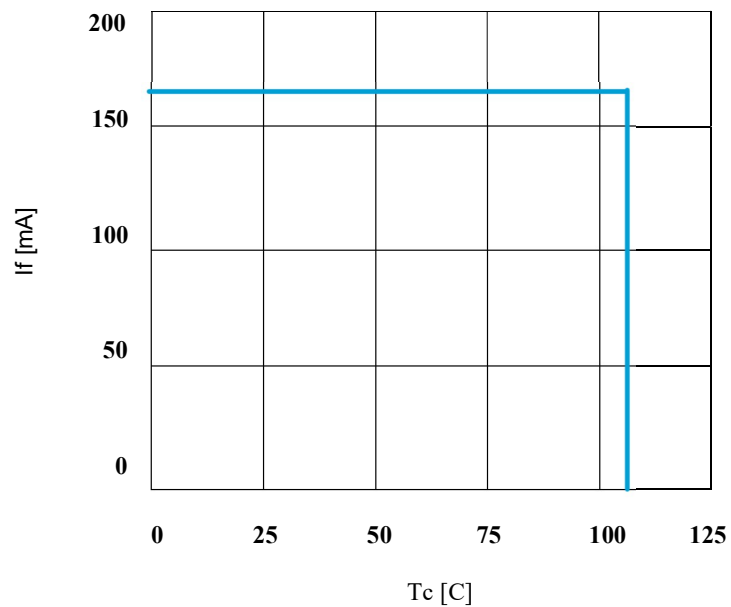

Reliability

Reliability Test

| Test Item | Test Condition |
|-------------------------------|--|
| Continuous Operation Test | If=90mA, Ta=25C (with A1-fin) × 1000 hours |
| | If=90mA, Tj=120C (with A1-fin) × 1000 hours |
| Low Temperature Storage Test | -40 C × 1000 hours |
| High Temperature Storage Test | 100 C × 1000 hours |
| Moisture-proof Test | 60C, 95%RH for 500 hours |
| Thermal Shock Test | -40 C × 30 minutes - 100 C × 30 minutes, 100 cycle |

Failure Criteria

(Tc=25C)

| Measuring Item | Symbol | Measuring Condition | Failure Criteria |
|---------------------|--------|---------------------|------------------|
| Forward Voltage | Vf | If=90mA | >U× 1.1 |
| Total Luminous Flux | ΦV | If=90mA | <S× 0.85 |


U defines the upper limit of the specified characteristics. S defines the initial value.

Note: Measurement shall be taken between 2 hours and 24 hours, and the test pieces should be return to the normal ambient conditions after the completion of each test.

Operating limits

The maximum current rating of the FL36COB3030 depends on the case temperature (T_c) when the LED has reached thermal equilibrium under steady-state operation. The graphs shown below assume that the system design employs good thermal management (thermal interface material and heat sink) and may vary when poor thermal management is employed. Polymatech Electronics LED recommends a maximum Junction temperature of 135 °C to ensure optimal LED lifetime.



PERFORMANCE

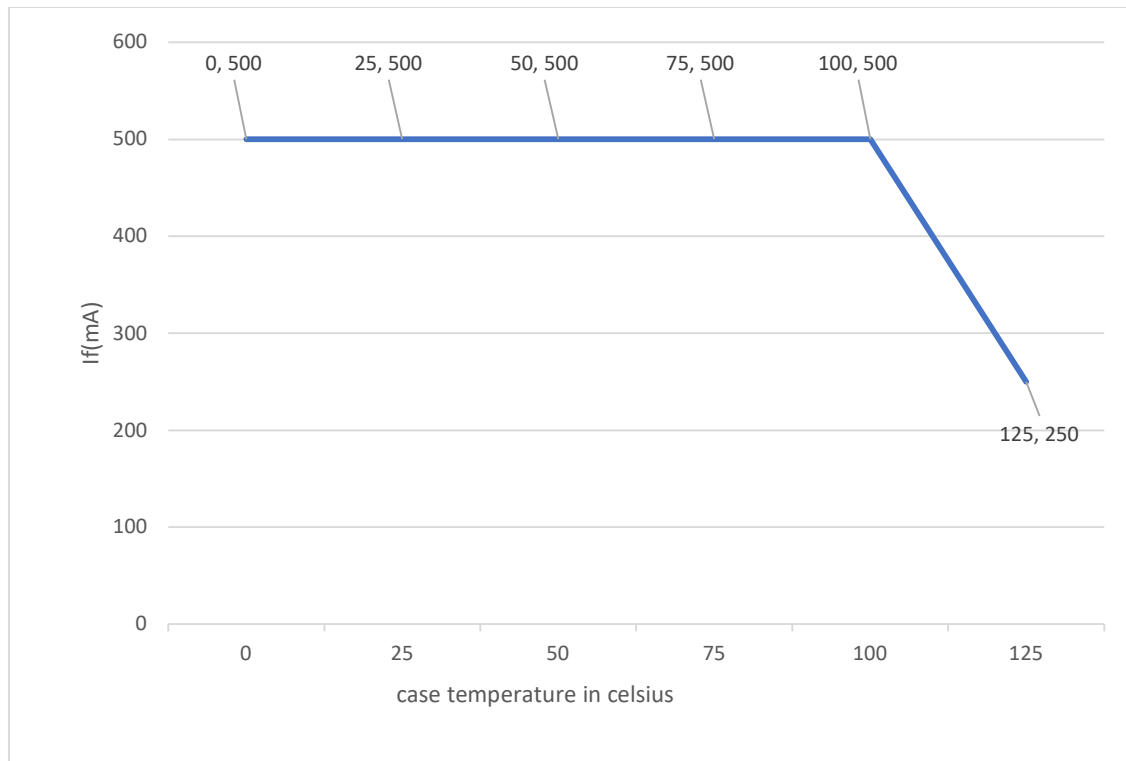

Packaging Specification

Packing

The package each tray contains 30 pieces of COBs and each box contains 12 trays of COBs (Vacuum Sealed).

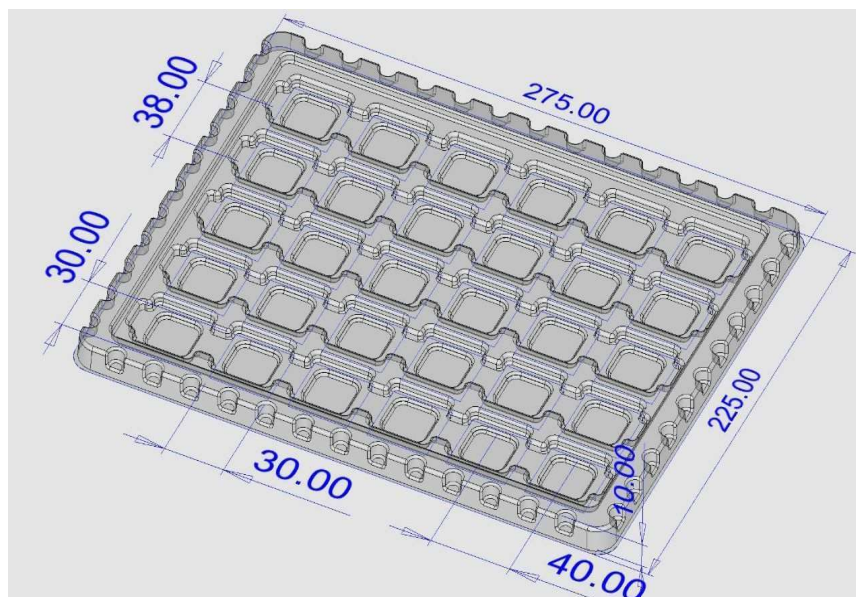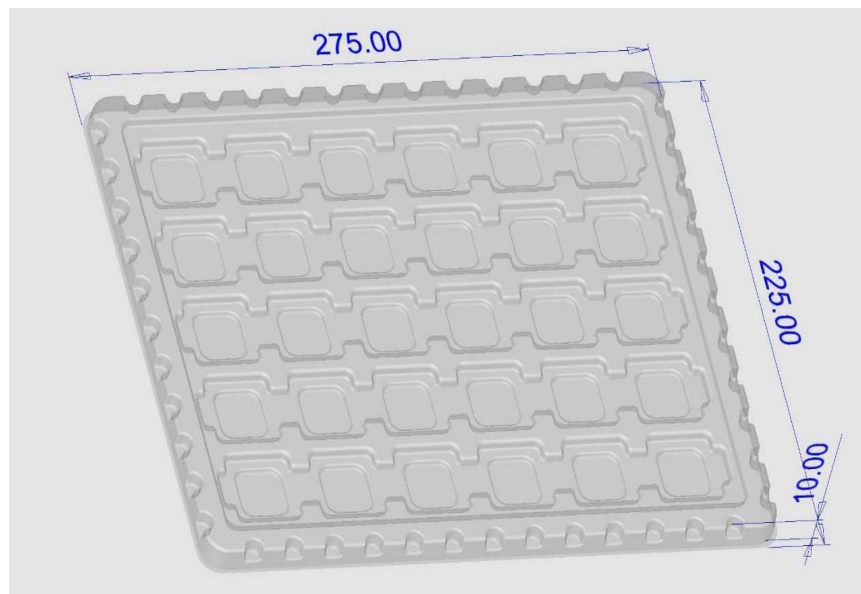

Precaution

Handling with care for this product

- Both the light emitting area and white rim around the light emitting area is composed of resin materials. Please avoid the resin area from being pressed, stressed, rubbed, come into contact with sharp metal nail (e.g. edge of reflector part) because the function, performance and reliability of this product are negatively impacted.
- Please be aware that this product should not come into contact with any other parts while incorporating in your lighting apparatus or your other products.
- Please be aware that careful handling is required after the attachment of lead wires to prevent the application of any load to the connections.
- For more information, please refer to application note "Instruction Manual (COB LED Package)".

Countermeasure against static electricity

- Handling of this product needs countermeasures against static electricity because this is a semiconductor product.
- Please take adequate measures to prevent any static electricity being produced such as the wearing of a wristband or anti-static gloves when handling this product.
- Every manufacturing facility in regard to the product (plant, equipment, machine, carrier machine and conveyance unit) should be connected to ground and please avoid the product to be electric-charged.
- ESD sensitivity of this product is over 1000V (HBM, based on JEITA ED-4701/304). After assembling the LEDs into your final product(s), it is recommended to check whether the assembled LEDs are damaged by static electricity (electrical leak phenomenon) or not.
- It is easy to find static damaged LED dies by a light-on test with the minimum current value.

Caution of product assembly

- Regarding this product assembling on the heat sink, it is recommended to use M4 screw. It might be good for screw tightening on the heat sink to do temporary tightening and final tightening. In addition, please don't press with excess stress on the product.
- The condition of the product assembling on the heat sink and the control of screw tightening torque needs to be optimized according to the specification of the heat sink.
- Roughness, unevenness and burr of surface negatively impact thermal bonding between the product and heat sink and increase heat thermal resistance between them. Confidence of thermally and mechanical coupling between the product and heat sink are confirmed by checking the mounting surface and measuring the case temperature of the product.
- In order to reduce the thermal resistance at assembly, it might be good to use TIM (Thermal Interface Material) on whole contact surface of the product. In case of using thermal grease for the TIM, it might be good to apply uniformly on the contact surface of the product.
- In case of using thermal sheet for the TIM, it might be good to make sure that the product is NOT strained by stress when the screws are tightened for assembly.
- For more information, please refer to application note "Instruction Manual (COB LED Package)".

Thermal Design

-The thermal design to draw heat away from the LED junction is most critical parameter for an LED illumination system. High operating temperatures at the LED junction adversely affect the performance of LED's light output and lifetime. Therefore, the LED junction temperature should not exceed the absolute maximum rating in LED illumination system.

-The LED junction temperature while operation of LED illumination system depends upon thermal resistance of internal LED package (R_{j-c}), outer thermal resistances of LED package, power loss and ambient temperature. Please take both of the thermal design specifications and ambient temperature conditions into consideration for the setting of driving conditions.

-For more information, please refer to application note "Thermal Management", "Instruction Manual (COB LED Package)".

Driving Current

-A constant current is recommended as an applying driving current to this product.

In the case of constant voltage driving, please connect current-limiting resistor to each product in series and control the driving current to keep under the absolute maximum rating forward current value.

-Electrical transient might apply excess voltage, excess current and reverse voltage to the product(s). They also affect negative impact on the product(s) therefore please make sure that no excess voltage, no excess current and no reverse voltage are applied to the product(s) when the LED driver is turn-on and/or turn-off.

-For more information, please refer to application note "Driving", "Instruction Manual (COB LED Package)".

Lighting at a minimum current value

-A minimum current value of lighting of all dice is 5 mA.

-When a minimum current is applied, LED dice may look different in their brightness due to the individual difference of the LED element, and it is not a failed product.

Electrical Safety

-This product is designed and produced according to IEC 62031:2008 IEC 62031:2008 LED modules for general lighting. Safety specification)

-Dielectric voltage withstand test has been conducted on this product to see any failure after applying voltage between active pads and aluminum section of the product, and to pass at least 500V.

-Considering conformity assessment for IEC62031:2008, almost all items of the specification depend upon your final product of LED illumination system. Therefore, please confirm with your final product for electrical safety of your product. As well, the products comply with the criteria of IEC62031:2008 as single LED package.

Recommended soldering Condition (This product is not adaptable to reflow process.)

-For manual soldering Please use lead-free soldering. Soldering shall be implemented using a soldering bit at a temperature lower than 350C, and shall be finished within 3.5 seconds for one land. No external force shall be applied to resin part while soldering is implemented. Next process of soldering should be carried out after the product has return to ambient temperature. Contacts number of soldering bit should be within twice for each terminal.

* Polymatech Electronics cannot guarantee if usage exceeds these recommended conditions. Please use it after sufficient verification is carried out on your own risk if absolutely necessary.

- For more information, please refer to application note "Instruction Manual (COB LED Package)".

Eye Safety

-The International Electrical Commission (IEC) published in 2006 IEC 62471 "2006 Photobiological safety of lamps and lamp systems" which includes LEDs within its scope. When sorting single LEDs according to IEC 62471, almost all white LEDs can be classified as belonging to either Exempt Group (no hazard) or Risk Group 1 (low risk). However, Optical characteristics of LEDs such as radiant flux, spectrum and light distribution are factors that affect the risk group determination of the LED, and especially a high-power LED, that emits light containing blue wavelengths, might have properties equivalent to those of Risk Group 2 (moderate risk).

-Great care should be taken when directly viewing an LED that is driven at high current, has multiple uses as a module or when focusing the light with optical instruments, as these actions might greatly increase the hazard to your eyes. It is recommended to regard the evaluation of stand-alone LED packages as a reference and to evaluate your final product.

This product is not designed for usage under the following conditions.

If the product might be used under the following conditions, you shall evaluate its effect and appropriate them. In places where the product might:

- directly and indirectly get wet due to rain and/or at place with the fear.
- be damage by seawater and/or at place with the fear
- be exposed to corrosive gas (such as Cl₂, H₂S, NH₃, SO_x, NO_x and so on) and/or at place with the fear.
- be exposed to dust, fluid or oil and/or at place with the fear.

The LEDs may not be able to maintain their specified performance if they used in a high temperature and high humidity environment.

Precaution with regard to product use

This document is provided for reference purposes only so that POLYMATECH ELECTRONICS products are used as intended. POLYMATECH ELECTRONICS neither makes warranties or representations with respect to the accuracy or completeness of the information contained in this document nor grants any license to any intellectual property rights or any other rights of POLYMATECH ELECTRONICS or any third party with respect to the information in this document. Before purchasing or using any POLYMATECH ELECTRONICS products listed in this document, please confirm the latest product information with a POLYMATECH ELECTRONICS sales office, and formal specifications must be exchanged and signed by both parties prior to mass production.

All information included in this document such as product data, diagrams, charts, is current as of the date this document is issued.

Such information, however, is subject to change without any prior notice.

POLYMATECH ELECTRONICS has used reasonable care in compiling the information included in this document, but POLYMATECH ELECTRONICS assumes no liability whatsoever for any damages incurred as a result of errors or omissions in the information included in this document.

Absent a written signed agreement, except as provided in the relevant

terms and conditions of sale for product, and to the maximum extent allowable by law, POLYMATECH ELECTRONICS assumes no liability whatsoever, including without limitation, indirect, consequential, special, or incidental damages or loss, including without limitation, loss of profits, loss of opportunities, business interruption and loss of data, and disclaims any and all express or implied warranties and conditions related to sale, use of product, or information, including warranties or conditions of merchantability, fitness for a particular purpose, accuracy of information, or no infringement.

Though POLYMATECH ELECTRONICS works continually to improve products' quality and reliability, products can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards to minimize risk and avoid situations in which a malfunction or failure of a product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. In addition, customers are also responsible for determining the appropriateness of use of any information contained in this document such as application cases not only with evaluating by their own but also by the entire system. POLYMATECH ELECTRONICS assumes no liability for customers' product design or applications.

The LEDs described in this brochure are intended to be used for ordinary electronic equipment (such as office equipment, communications equipment, measurement instruments and household appliances). Consult POLYMATECH Electronics sales staff in advance for information on the applications in which exceptional quality and reliability are required, particularly when the failure or malfunction of the LEDs may directly jeopardize life or health (such as for airplane, aerospace, submersible repeaters, nuclear reactor control system, automobiles, traffic control equipment, life support system and safety devices). This LED does not comply with ISO/TS 16949 (IATF16949) and is not intended for automotive applications.

The customer shall not reserve engineer by disassembling or analysis of the LEDs without having prior written consent from POLYMATECH Electronics. When defective LEDs are found, the customer shall inform POLYMATECH Electronics before disassembling or analysis.

When exporting our products, please ensure conformance with applicable laws and regulations and take appropriate actions such as obtaining an export license. Please do not use or supply our products for any weapons of mass destruction (WMD) or for any other military purposes. If we do not receive standing orders, we may recommend another product. If this product is to be used for a different model or for a succeeding model continuously, please contact our sales staff.

Please contact POLYMATECH ELECTRONICS sales office if you have any questions regarding the information contained in this document, or if you have any other inquiries.